



TRUCK & BUS RADIAL TIRE



ROYAL MEGA

CONTENTS

1**LONG HAUL** 03**4****MINING** 41**2****REGIONAL** 15**5****WINTER** 51**3****ON&OFF** 31**6****ALL SEASON** 55**• DATASHEET** 59-----62

LONG HAUL



Premium A01 05

Premium A02 06

Premium D02 06

Premium D19 07

Premium A27 07

Premium A23 08

Premium D26 08

Premium D01 09

Premium D28 09

Premium D20 10

Premium D23 10

Premium D03 11

Premium A06 12

Premium A08 12

Premium A03 13

Premium A10 14


Premium A07 14

Premium A01

SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION ON FIRST-CLASS HIGHWAY
OR ROAD IN GOOD CONDITION



Widened tread design



Excellent loading capacity



Excellent water evacuation performance



Excellent anti-wear performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11,00R20	18PR	16.5	8.0	3550/3250	152/149	K	930
12,00R20	20PR	16.5	8.5	4000/3650	156/153	K	900
11R22.5	18PR	15.5	8.25	3250/3000	149/146	L	930
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930
13R22.5	20PR	17.0	9.75	4000/3650	156/153	K	930
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
385/65R22.5	20PR	16.5	11.75	4500	160	K	900



Premium A02

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Excellent anti-clamping stone and self-cleaning performance



Good grip and wet skid resistance




Evenly distributes grounding pressure, and irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830
11R24.5	16PR	15.0	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	L	830



Premium D02

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good puncture resistance



Good grip and driving performance



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	L	830
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830



Premium D19

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low heat formula design



Good braking, driving performance




Good anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	M	830
11R24.5	16PR	20.5	8.25	3250/3000	149/146	M	830
295/75R22.5	16PR	20.0	9.00	3000/2725	146/143	L	830



Premium A27

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Anti-wear performance



Good anti-clamping stone performance



Good grip performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
7.00R16LT	14PR	11.5	5.50F	1320/1180	118/114	L	770
225/70R19.5	16PR	14.0	6.75	1900/1800	130/128	L	830
215/75R17.5	16PR	13.0	6.00	1750/1600	127/124	L	830
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830



Premium A23

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good water evacuation performance



Evenly distributes grounding pressure, good irregular wear resistance




Excellent heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	10.5	8.25	3000/2725	146/143	M	830



Premium D26

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low heat formula design



Good heat dissipation performance



Excellent control performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900



Premium D01

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance




Excellent braking, driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	18.5	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	20.0	9.00	4125/3750	157/154	K	900



Premium D28

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Long driving mileage




High saturation pattern design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	19.5	9.00	3550/3250	152/149	M	900



Premium D20

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good puncture resistance



Good grip and driving performance



Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	20.5	8.25	3000/2725	146/143	L	830
11R24.5	16PR	20.5	8.25	3250/3000	149/146	K	830



Premium D23

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Widened tread design



Good heat dissipation performance




Excellent braking, driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	21.0	9.00	3550/3250	152/149	K	930

Premium D03

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION




Good traction performance



Excellent resistance of groove cracking



Excellent anti-clamping stone and
self-cleaning performance



Excellent durability




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
9.5R17.5	18PR	15.5	6.75	2725/2575	143/141	J	875
245/70R17.5	18PR	15.5	7.50	2120/2000	134/132	K	900
225/70R19.5	16PR	15.5	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	15.5	6.75	2000/1900	132/130	K	900
265/70R19.5	16PR	16.0	7.5	2500/2360	140/138	L	775
265/70R19.5	18PR	16.0	7.5	2725/2575	143/141	J	850
215/75R17.5	18PR	15.5	6.00	2180/2060	135/133	J	850
235/75R17.5	18PR	15.5	6.75	2725/2575	143/141	J	875
225/80R17.5	18PR	14.0	6.75	1550/1500	123/122	L	700
315/80R22.5	20PR	20.0	9.00	4125/3750	157/154	K	900




Premium A06

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Low heat generation

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	15.0	8.25	3000/2725	146/143	M	830




Premium A08


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low rolling resistance and anti-wear
formula design



Excellent wear evacuation performance




Low heat generation


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
285/75R24.5	16PR	14.5	8.25	3075/2800	147/144	L	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	14.5	9.00	4125/3750	157/154	K	900

Premium A03

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low rolling resistance formula design



Excellent water evacuation performance



Evenly distributes grounding pressure,
good irregular wear resistance




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
9.5R17.5	16PR	14.0	6.75	2060/1950	133/131	L	830
9.5R17.5	18PR	14.0	6.75	2725/2575	143/141	J	875
11R22.5	16PR	15.5	8.25	3000/2725	146/143	M	830
11R24.5	16PR	15.5	8.25	3250/3000	149/146	L	830
12R22.5	18PR	16.5	9.00	3550/3250	152/149	L	930
215/75R17.5	16PR	12.0	6.00	1750/1600	127/124	L	830
225/80R17.5	18PR	13.0	6.75	1550/1500	123/121	L	700
225/90R17.5	16PR	14.0	6.75	2060/1950	133/131	L	830
235/75R17.5	16PR	13.0	6.75	2000/1850	132/129	L	830
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830
245/70R17.5	18PR	15.5	7.50	2120/2000	134/132	K	900
255/70R22.5	16PR	13.0	7.50	2500/2300	140/137	L	830
265/70R19.5	16PR	14.0	7.50	2500/2360	140/138	L	775
265/70R19.5	18PR	14.0	7.50	2725/2575	143/141	J	850
275/70R22.5	18PR	15.0	8.25	3000/2725	146/143	L	900
275/80R22.5	18PR	15.0	8.25	3250/3000	149/146	L	900
295/60R22.5	18PR	16.0	9.00	3350/3075	150/147	L	900
295/75R22.5	16PR	15.0	9.00	3000/2725	146/143	M	830
295/80R22.5	18PR	15.5	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	L	900



Premium A10

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low rolling resistance



Excellent water evacuation performance




Good irregular wear resistance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	14.5	9.00	3550/3250	152/149	M	900
315/80R22.5	20PR	14.0	9.00	4125/3750	157/154	L	900



Premium A07


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Low heat super anti-wear
formula



Excellent water evacuation
performance



Good fatigue resistance



Ultra-high strength steel belt
structure

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930

REGIONAL



Premium D17 17

Premium A21 18

Premium D51 18

Premium D27 19

Premium D18 19

Premium D16 20

Premium D07 20

Premium A22 21

Premium A16 22

Premium D21 22

Premium A26 23

Premium A12 24

Premium A18 24

Premium A20 25

Premium A17 26

Premium A09 26

Premium D29 27


Premium A11 28

Premium A19 29

Premium A20A 30

Premium D17

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good puncture resistance



Strong grip and driving performance



Good heat dissipation performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	L	830
11R24.5	16PR	23.0	8.25	3250/3000	149/146	K	830



Premium A21

SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Good tread heat dissipation



Good adaptability of road conditions



Zigzag pattern design, provides good water evacuation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
13R22.5	20PR	16.5	9.75	4000/3650	156/153	K	900




Premium D51


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good driving performance



Good chunking resistance



Good loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	18.5	9.00	3550/3250	152/149	K	930



Premium D27


SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Good driving performance



Good heat dissipation performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10,00R20	18PR	19,0	7,5	3250/3000	149/146	K	930



Premium D18


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good driving performance



Good heat dissipation performance



Good durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10,00R20	18PR	19,0	7,5	3250/3000	149/146	K	930



Premium D16

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Excellent self-cleaning performance



Good groove bottom crack resistance



Excellent braking and driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	22,0	8,25	3000/2725	146/143	L	830




Premium D07

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Excellent grip performance



Excellent durability




Good heat dissipation on shoulder

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11,00R20	18PR	20,0	8,0	3550/3250	152/149	K	930

Premium A22

SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent durability



Good adaptability of road surface



Good anti-skid performance




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
8.25R20	14PR	15.5	6.5	2430/2300	139/137	K	830
8.25R20	16PR	15.5	6.5	2240/2120	136/134	K	930
9.00R20	16PR	15.5	7.0	2800/2650	144/142	K	900
10.00R20	18PR	16.0	7.5	3250/3000	149/146	K	930



Premium A16

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Excellent durability



Good steering quality



Good anti-skid performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
9.00R20	16PR	15.5	7.0	2800/2650	144/142	K	900
10.00R20	18PR	16.0	7.5	3250/3000	149/146	K	930




Premium D21

SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Excellent anti-clamping stone performance



Ground stress evenly distributed



Mixed block pattern design, provides good driving performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R24.5	16PR	19.5	8.25	3250/3000	149/146	L	830
285/75R24.5	16PR	19.5	8.25	3075/2800	147/144	L	830
295/75R22.5	16PR	19.5	9.00	3000/2725	146/143	L	830

Premium A26


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Good tread heat dissipation



Good adaptability of road conditions



Zigzag pattern design, provides good water
evacuation performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
6.50R16LT	12PR	10.0	5.50F	1060/925	110/105	K	670
7.50R16LT	14PR	13.0	6.00G	1500/1320	122/118	L	770
8.25R16LT	16PR	14.0	6.50H	1800/1600	128/124	K	770
9.00R20	16PR	15.5	7.0	2800/2650	144/142	K	900
10.00R20	18PR	16.0	7.5	3250/3000	149/146	K	930
11.00R20	18PR	17.0	8.0	3550/3250	152/149	K	930
12.00R20	20PR	17.5	8.5	4000/3650	156/153	K	900
12.00R24	20PR	17.5	8.5	4500/4125	160/157	K	900
11R22.5	16PR	15.0	8.25	3000/2725	146/143	K	830
12R22.5	18PR	15.0	9.00	3550/3250	152/149	K	930
13R22.5	18PR	17.5	9.75	3750/3450	154/151	K	830
315/80R22.5	20PR	15.0	9.00	4125/3750	157/154	K	900



Premium A12

SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Excellent resistance to stone retention



Good control performance




Good heat dissipation performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
385/65R22.5	20PR	15.5	11.75	4500	160	K	900
385/65R22.5	24PR	15.5	11.75	5000	164	K	900



Premium A18

SUITABLE FOR MID-SHORT DISTANCE
TRANSPORTATION OF PAVED ROAD AND MIXED ROAD



Good durability and loading performance



Good traction performance



Good adaptability of road surface


SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	16.5	8.0	3550/3250	152/149	K	930
12.00R20	20PR	17.0	8.5	4000/3650	156/153	K	930

Premium A20

SUITABLE FOR MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



High anti-wear formula design



Optimized bead design



Excellent control performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
7.00R16LT	14PR	11.0	5.50F	1320/1180	118/114	L	770
11.00R20	18PR	16.5	8.0	3550/3250	152/149	K	930
12.00R20	20PR	16.5	8.5	4000/3650	156/153	K	900
12R22.5	18PR	18.0	9.00	3550/3250	152/149	L	930
11R22.5	16PR	16.0	8.25	3000/2725	146/143	M	830
11R24.5	16PR	16.0	8.25	3250/3000	149/146	L	830
12.00R24	20PR	17.5	8.5	4500/4125	160/157	K	900
12.00R24	22PR	17.5	8.5	5000/4750	164/162	K	900
295/80R22.5	18PR	16.0	9.00	3550/3250	152/149	L	900
315/80R22.5	20PR	16.0	9.00	4125/3750	157/154	L	900
325/95R24	20PR	17.5	9.00	5000/4750	164/162	K	900




Premium A17

SUITABLE FOR MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



High mileage



Reinforced skeleton material design




Optimized tire grounding design prevents irregular wear

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
245/70R17.5	18PR	14.0	7.50	2120/2000	134/132	L	900
245/70R19.5	16PR	14.0	7.50	2180/2060	135/133	L	830



Premium A09


SUITABLE FOR MID-LONG DISTANCE NATIONAL HIGHWAY TRANSPORTATION



Low heat formula design



Optimized groove bottom design



Strengthen bead design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	16.5	9.00	3550/3250	152/149	L	900

Premium D29

SUITABLE FOR MID-SHORT DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Strong driving and braking performance



Good heat dissipation performance on shoulder



Excellent grip performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	18.0	9.00	3550/3250	152/149	L	900

Premium A11


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



Excellent wear resistance



Low fuel consumption



Low heat of tread formula




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
385/65R22.5	20PR	16.7	11.75	4500	160	K	900
385/65R22.5	24PR	16.7	11.75	5000	164	K	900
385/55R22.5	20PR	16.5	12.25	4500	160	K	900

Premium A19

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Excellent grip



Excellent durability and loading performance



Good heat dissipation on shoulder




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	16.5	8.5	4000/3650	156/153	K	900

Premium A20A


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Anti-clamping stone performance



Excellent durability



Crown explosion-proof performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
10.00R20	18PR	17.5	7.5	3250/3000	149/146	K	930
13R22.5	20PR	18.0	9.75	4000/3650	156/153	K	930

ON&OFF



Premium D31 33

Premium D37 33

Premium D38 34

Premium D30 34

Premium D33 35

Premium D06 36

Premium D08 36

Premium D39 37

Premium D12 37

Premium D32 38

Premium D36 38

Premium D06+ 39

Premium D32+ 40




Premium D31


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF ROUGH ROADS



Good driving, braking performance



Good durability




Low heat formula

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
425/65R22.5	22PR	18.0	12.25	5300	166	K	900

Premium D37


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Low heat generation



Excellent grip, anti-skid performance




Strengthened carcass and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
7.50R16LT	14PR	15.5	6.00G	1500/1320	122/118	K	770
8.25R16LT	18PR	15.0	6.50H	2000/1800	132/128	K	870
9.00R20	16PR	18.5	7.0	2800/2650	144/142	K	900
10.00R20	18PR	19.5	7.5	3250/3000	149/146	K	930

Premium D38

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good durability and loading performance



Good driving and grip performance



Good anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
9.00R20	16PR	18.5	7.0	2800/2650	144/142	K	900
10.00R20	18PR	19.0	7.5	3250/3000	149/146	K	930

Premium D30

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF ROUGH ROADS



Good driving, braking performance



Good durability



Low heat formula

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
315/80R22.5	20PR	20.5	9.00	4125/3750	157/154	K	900

Premium D33

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF MINING AREA AND MIXED ROADS




Tear resistance pattern groove



Excellent grip and driving performance



Crown explosion-proof performance

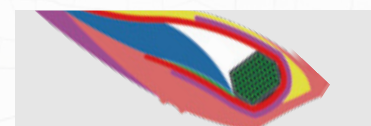

Excellent durability




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	K	930



Premium D06

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good loading performance



Good driving performance



Good anti-clamping stone performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
13R22.5	20PR	21.0	9.75	4000/3650	156/153	K	930
11.00R20	18PR	20.0	8.0	3550/3250	152/149	K	930
12.00R20	20PR	21.0	8.5	4000/3650	156/153	K	900



Premium D08


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Excellent driving, braking performance



Good heat dissipation on shoulder




Strong carcass and bead

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	20.0	8.0	3550/3250	152/149	K	930



Premium D39


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF ROUGH ROADS



Low heat and anti-wear formula design



Excellent driving,braking performance



Excellent durability

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	L	830



Premium D12


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good tear resistance performance



Good driving,braking performance



Good loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	18.5	8.5	4000/3650	156/153	K	900



Premium D32


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good driving performance



Anti-clamping stone design



Good durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	19.0	8.5	4000/3650	156/153	K	900



Premium D36

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
ON MIXED ROADS



Super smooth driving surface design



Excellent driving and braking performance




Excellent durability and loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	21.0	9.00	3550/3250	152/149	K	900
295/80R22.5	20PR	21.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/151	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	K	930

Premium D06+

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good loading performance



Good driving performance



Good anti-clamping stone performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	21.0	8.5	4000/3650	156/153	K	900

Premium D32+

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Good driving performance



Anti-clamping stone design



Good durability and loading performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	19.0	8.5	4000/3650	156/153	K	900

MINING



Premium M01 43

Premium M03 47

Premium M08 44

Premium M07 48

Premium M09 44

Premium M10 49

Premium M16 45

Premium M02 49

Premium M06 46

Premium M12 50

Premium M01


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Super smooth driving surface design



Excellent driving and braking performance



Excellent durability and loading performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	23.0	8.5	4000/3650	156/153	G	900
12.00R20	22PR	23.0	8.5	4250/3875	158/155	G	970
12R22.5	18PR	24.0	9.00	3550/3250	152/149	J	930
295/80R22.5	18PR	22.0	9.00	3550/3250	152/149	J	900
295/80R22.5	20PR	22.0	9.00	3750/3450	154/151	G	930
315/80R22.5	20PR	22.0	9.00	4125/3750	157/151	K	900
315/80R22.5	22PR	22.0	9.00	4500/4125	160/157	G	930



Premium M08

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF PAVED ROAD AND MIXED ROAD



Excellent grip and driving performance



Good tear resistance performance



Good braking performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	23.0	8.25	3000/2725	146/143	G	830
11R24.5	16PR	21.0	8.25	3250/3000	149/146	G	830




Premium M09

SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION
OF ROUGH ROADS



Excellent grip driving performance



Excellent puncture resistance performance




Deepened pattern groove design

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
295/80R22.5	18PR	24.0	9.00	3550/3250	152/149	K	900

Premium M16


SUITABLE FOR MINING AREA AND ROUGH ROADS
TRANSPORTATION



Excellent puncture resistance, cutting
resistance



Excellent driving and braking performance




Excellent loading performance



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	24.5	8.5	4000/3650	156/153	D	900

Premium M06


SUITABLE FOR MINING AREA AND ROUGH ROADS
TRANSPORTATION



Excellent puncture resistance



Strong driving force




Excellent loading performance




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	23.0	8.5	4000/3650	156/153	G	900
13R225	20PR	23.0	9.75	4000/3650	156/153	G	930

Premium M03

SUITABLE FOR MINING AREA AND ROUGH ROADS TRANSPORTATION



Excellent cutting resistance,explosion proof performance



Excellent loading performance




Strong driving force




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	24.0	8.0	3550/3250	152/149	D	930
12.00R20	20PR	26.0	8.5	4000/3650	156/153	D	900

Premium M07

SUITABLE FOR MINING AREA AND ROUGH ROADS TRANSPORTATION



Excellent cutting resistance,explosion proof performance



Excellent loading performance



Strong driving force



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12.00R20	20PR	26.0	8.5	4000/3650	156/153	D	900




Premium M10


SUITABLE FOR MID-SHORT DISTANCE TRANSPORTATION OF MINING AREA AND MIXED ROADS



Excellent grip and driving performance



Excellent durability




Tear resistance pattern groove

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
12R22.5	18PR	20.5	9.00	3550/3250	152/149	D	930



Premium M02


SUITABLE FOR MINING AREA AND ROUGH ROADS TRANSPORTATION



Excellent puncture resistance, cut and chip resistance



Excellent driving and braking performance




Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11.00R20	18PR	24.0	8.0	3550/3250	152/149	D	930
12.00R20	20PR	25.0	8.5	4000/3650	156/153	D	900



Premium M12


SUITABLE FOR MINING AREA AND ROUGH ROADS TRANSPORTATION



Excellent puncture performance



Strong driving force



Excellent loading performance

SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
7.50R16LT	16PR	16.5	6.00G	1650/1450	125/121	D	870
8.25R16LT	18PR	20.0	6.50H	2000/1800	132/128	D	870
9.00R20	16PR	22.5	7.0	2800/2650	144/142	D	900
10.00R20	18PR	23.0	7.5	3250/3000	149/146	D	930
12.00R20	20PR	24.0	8.5	4000/3650	156/153	G	900



WINTER



Premium W01 53


Premium W02 54






Premium W01

SUITABLE FOR SNOW-COVERED ROAD TRANSPORTATION




3D sipe design



Excellent skid resistance



Excellent traction,braking performance



Special snow traed fomula design




SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	21.0	8.25	3000/2725	146/143	K	830
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830



Premium W02

SUITABLE FOR SNOW-COVERED ROAD TRANSPORTATION




3D sipe design



Excellent skid resistance



Excellent traction,braking performa



Special snow traed fomula design



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	21.0	8.25	3000/2725	146/143	K	830
11R24.5	16PR	21.0	8.25	3250/3000	149/146	K	830
295/75R22.5	16PR	23.0	9.00	3000/2725	146/143	K	830

ALL SEASON



Premium AS01 57

Premium AS02 58

Premium AS01


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



3D siping design improves grip



Excellent handling performance



Excellent durability



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
225/70R19.5	14PR	16.0	6.75	1800/1700	128/126	M	760
225/70R19.5	16PR	16.0	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	16.0	6.75	2000/1900	132/130	K	900

Premium AS02


SUITABLE FOR MID-LONG DISTANCE NATIONAL
HIGHWAY TRANSPORTATION



3D siping design improves grip



Excellent handling performance



Excellent durability



SIZE	PLY RATING	TREAD DEPTH (MM)	STANDARD RIM	LOAD SINGLE / DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (kpa)
11R22.5	16PR	22.0	8.25	3000/2725	146/143	K	830
11R24.5	16PR	22.0	8.25	3250/3000	149/146	K	830

LOAD INDEX AND SPEED LEVEL

The maximum capacity of load and speed is marked on all tires. These load and speed indices are shown in the following table.

When the load index is displayed as two values (e.g. 152 / 149), the first value represents the tire load in the single tire configuration, the second value represents the tire load in the dual tire configuration.

LOAD INDEX (LI)

LOAD INDEX	KG	LOAD INDEX	KG	LOAD INDEX	KG
101	825	131	1950	161	4625
102	850	132	2000	162	4750
103	875	133	2060	163	4875
104	900	134	2120	164	5000
105	925	135	2180	185	5150
106	950	136	2240	166	5300
107	975	137	2300	167	5450
108	1000	138	2360	168	5600
109	1030	139	2430	169	5800
110	1060	140	2500	170	6000
111	1090	141	2575	171	6150
112	1120	142	2650	172	6300
113	1150	143	2725	173	6500
114	1180	144	2800	174	6700
115	1215	145	2900	175	6900
116	1250	146	3000	176	7100
117	1285	147	3075	177	7300
118	1320	148	3150	178	7500
119	1360	149	3250	179	7750
120	1400	150	3350	180	8000
121	1450	151	3450		
122	1500	152	3550		
123	1550	153	3650		
124	1600	154	3750		
125	1650	155	3875		
126	1700	156	4000		
127	1750	157	4125		
128	1800	158	4250		
129	1850	159	4375		
130	1900	160	4500		

SPEED SYMBOL AND SPEED CORRESPONDENCE TABLE

SPEED SYMBOL	SPEED(km/h)	SPEED(mph/h)
1	5	3
A2	10	6
A3	15	9
A4	20	12
A5	25	16
A6	30	19
A7	35	22
A8	40	25
B	50	31
C	60	37
D	65	40
E	70	43
F	80	50
G	90	56
J	100	62
K	110	68
L	120	75
M	130	81
N	140	87

SIZE	PLY RATING	PATTERN NO.	TREAD DETH (mm)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (Kpa)
6.50R16LT	12PR	Premium A26	10.0	5.50F	1060/925	110/105	K	670
7.00R16LT	14PR	Premium A27	11.5	5.50F	1320/1180	118/114	L	770
7.00R16LT	14PR	Premium A20	11.0	5.50F	1320/1180	118/114	L	770
7.50R16LT	14PR	Premium A26	13.0	6.00G	1500/1320	122/118	L	770
7.50R16LT	14PR	Premium D37	15.5	6.00G	1500/1320	122/118	K	770
7.50R16LT	16PR	Premium M12	16.5	6.00G	1650/1450	125/121	D	870
8.25R16LT	16PR	Premium A26	14.0	6.50H	1800/1600	128/124	K	770
8.25R16LT	18PR	Premium D37	15.0	6.50H	2000/1800	132/128	K	870
8.25R16LT	18PR	Premium M12	20.0	6.50H	2000/1800	132/128	D	870
8.25R20	14PR	Premium A22	15.5	6.5	2430/2300	139/137	K	830
8.25R20	16PR	Premium A22	15.5	6.5	2240/2120	136/134	K	930
9.00R20	16PR	Premium A22	15.5	7.0	2800/2650	144/142	K	900
9.00R20	16PR	Premium A16	15.5	7.0	2800/2650	144/142	K	900
9.00R20	16PR	Premium A26	15.5	7.0	2800/2650	144/142	K	900
9.00R20	16PR	Premium D37	18.5	7.0	2800/2650	144/142	K	900
9.00R20	16PR	Premium D38	18.5	7.0	2800/2650	144/142	K	900
9.00R20	16PR	Premium M12	22.5	7.0	2800/2650	144/142	D	900
9.5R17.5	18PR	Premium D03	15.5	6.75	2725/2575	143/141	J	875
9.5R17.5	16PR	Premium A03	14.0	6.75	2060/1950	133/131	L	830
9.5R17.5	18PR	Premium A03	14.0	6.75	2725/2575	143/141	J	875
10.00R20	18PR	Premium D27	19.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium D18	19.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium A22	16.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium A16	16.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium A26	16.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium A20A	17.5	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium D37	19.5	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium D38	19.0	7.5	3250/3000	149/146	K	930
10.00R20	18PR	Premium M12	23.0	7.5	3250/3000	149/146	D	930
11.00R20	18PR	Premium A01	16.5	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium D07	20.0	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium A26	17.0	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium A18	16.5	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium A20	16.5	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium D06	20.0	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium D08	20.0	8.0	3550/3250	152/149	K	930
11.00R20	18PR	Premium M02	24.0	8.0	3550/3250	152/149	D	930
11.00R20	18PR	Premium M03	24.0	8.0	3550/3250	152/149	D	930
11R22.5	18PR	Premium A01	15.5	8.25	3250/3000	149/146	L	930
11R22.5	16PR	Premium D02	23.0	8.25	3000/2725	146/143	L	830
11R22.5	16PR	Premium D19	20.5	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium A02	15.0	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium A23	10.5	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium D20	20.5	8.25	3000/2725	146/143	L	830
11R22.5	16PR	Premium A06	15.0	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium A03	15.5	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium D17	23.0	8.25	3000/2725	146/143	L	830
11R22.5	16PR	Premium D16	22.0	8.25	3000/2725	146/143	L	830
11R22.5	16PR	Premium A26	15.0	8.25	3000/2725	146/143	K	830
11R22.5	16PR	Premium A20	16.0	8.25	3000/2725	146/143	M	830
11R22.5	16PR	Premium D39	22.0	8.25	3000/2725	146/143	L	830
11R22.5	16PR	Premium M08	23.0	8.25	3000/2725	146/143	G	830
11R22.5	16PR	Premium W01	21.0	8.25	3000/2725	146/143	K	830
11R22.5	16PR	Premium W02	21.0	8.25	3000/2725	146/143	K	830
11R22.5	16PR	Premium AS02	22.0	8.25	3000/2725	146/143	K	830
11R24.5	16PR	Premium D02	23.0	8.25	3250/3000	149/146	K	830
11R24.5	16PR	Premium D19	20.5	8.25	3250/3000	149/146	M	830
11R24.5	16PR	Premium A02	15.0	8.25	3250/3000	149/146	M	830
11R24.5	16PR	Premium D20	20.5	8.25	3250/3000	149/146	K	830
11R24.5	16PR	Premium A03	15.5	8.25	3250/3000	149/146	L	830

SIZE	PLY RATING	PATTERN NO.	TREAD DETH (mm)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (Kpa)
11R24.5	16PR	Premium D17	23.0	8.25	3250/3000	149/146	K	830
11R24.5	16PR	Premium D21	19.5	8.25	3250/3000	149/146	L	830
11R24.5	16PR	Premium A20	16.0	8.25	3250/3000	149/146	L	830
11R24.5	16PR	Premium M08	21.0	8.25	3250/3000	149/146	G	830
11R24.5	16PR	Premium W01	21.0	8.25	3250/3000	149/146	K	830
11R24.5	16PR	Premium W02	21.0	8.25	3250/3000	149/146	K	830
11R24.5	16PR	Premium AS02	22.0	8.25	3250/3000	149/146	K	830
12.00R20	20PR	Premium A01	16.5	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium A26	17.5	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium A18	17.0	8.5	4000/3650	156/153	K	930
12.00R20	20PR	Premium A20	16.5	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium A19	16.5	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium D06	21.0	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium D12	18.5	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium D32	19.0	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium D06+	21.0	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium D32+	19.0	8.5	4000/3650	156/153	K	900
12.00R20	20PR	Premium M01	23.0	8.5	4000/3650	156/153	G	900
12.00R20	22PR	Premium M01	23.0	8.5	4250/3875	158/155	G	970
12.00R20	20PR	Premium M02	25.0	8.5	4000/3650	156/153	D	900
12.00R20	20PR	Premium M12	24.0	8.5	4000/3650	156/153	G	900
12.00R20	20PR	Premium M16	24.5	8.5	4000/3650	156/153	D	900
12.00R20	20PR	Premium M03	26.0	8.5	4000/3650	156/153	D	900
12.00R20	20PR	Premium M06	23.0	8.5	4000/3650	156/153	G	900
12.00R20	20PR	Premium M07	26.0	8.5	4000/3650	156/153	D	900
12R22.5	18PR	Premium A01	18.0	9.00	3550/3250	152/149	L	930
12R22.5	18PR	Premium D23	21.0	9.00	3550/3250	152/149	K	930
12R22.5	18PR	Premium A03	16.5	9.00	3550/3250	152/149	L	930
12R22.5	18PR	Premium A07	18.0	9.00	3550/3250	152/149	L	930
12R22.5	18PR	Premium D51	18.5	9.00	3550/3250	152/149	K	930
12R22.5	18PR	Premium A26	15.0	9.00	3550/3250	152/149	K	930
12R22.5	18PR	Premium A20	18.0	9.00	3550/3250	152/149	L	930
12R22.5	18PR	Premium D33	20.5	9.00	3550/3250	152/149	K	930
12R22.5	18PR	Premium M01	24.0	9.00	3550/3250	152/149	J	930
12R22.5	18PR	Premium M10	20.5	9.00	3550/3250	152/149	D	930
12.00R24	20PR	Premium A26	17.5	8.5	4500/4125	160/157	K	900
12.00R24	20PR	Premium A20	17.5	8.5	4500/4125	160/157	K	900
12.00R24	22PR	Premium A20	17.5	8.5	5000/4750	164/162	K	900
13R22.5	20PR	Premium A01	17.0	9.75	4000/3650	156/153	K	930
13R22.5	20PR	Premium A21	16.5	9.75	4000/3650	156/153	K	900
13R22.5	18PR	Premium A26	17.5	9.75	3750/3450	154/151	K	830
13R22.5	20PR	Premium A20A	18.0	9.75	4000/3650	156/153	K	930
13R22.5	20PR	Premium D06	21.0	9.75	4000/3650	156/153	K	930
13R22.5	20PR	Premium M06	23.0	9.75	4000/3650	156/153	G	930
215/75R17.5	16PR	Premium A27	13.0	6.00	1750/1600	127/124	L	830
215/75R17.5	16PR	Premium A03	12.0	6.00	1750/1600	127/124	L	830
215/75R17.5	18PR	Premium D03	15.5	6.00	2180/2060	135/133	J	850
225/70R19.5	16PR	Premium A27	14.0	6.75	1900/1800	130/128	L	830
225/70R19.5	16PR	Premium D03	15.5	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	Premium D03	15.5	6.75	2000/1900	132/130	K	900
225/70R19.5	14PR	Premium AS01	16.0	6.75	1800/1700	128/126	M	760
225/70R19.5	16PR	Premium AS01	16.0	6.75	1900/1800	130/128	L	830
225/70R19.5	18PR	Premium AS01	16.0	6.75	2000/1900	132/130	K	900
225/80R17.5	18PR	Premium D03	14.0	6.75	1550/1500	123/122	L	700
225/80R17.5	18PR	Premium A03	13.0	6.75	1550/1500	123/121	L	700
225/90R17.5	16PR	Premium A03	14.0	6.75	2060/1950	133/131	L	830
235/75R17.5	16PR	Premium A27	13.0	6.75	2000/1850	132/129	L	830
235/75R17.5	18PR	Premium D03	15.5	6.75	2725/2575	143/141	J	875
235/75R17.5	16PR	Premium A03	13.0	6.75	2000/1850	132/129	L	830
245/70R17.5	18PR	Premium D03	15.5	7.50	2120/2000	134/132	K	900

SIZE	PLY RATING	PATTERN NO.	TREAD DETH (mm)	STANDARD RIM	LOAD SINGLE/DUAL	LOAD INDEX	SPEED RATE	AIR PRESSURE (Kpa)
245/70R19.5	16PR	Premium A03	14.0	7.50	2180/2060	135/133	L	830
245/70R17.5	18PR	Premium A03	15.5	7.50	2120/2000	134/132	K	900
245/70R17.5	18PR	Premium A17	14.0	7.50	2120/2000	134/132	L	900
245/70R19.5	16PR	Premium A17	14.0	7.50	2180/2060	135/133	L	830
255/70R22.5	16PR	Premium A03	13.0	7.50	2500/2300	140/137	L	830
265/70R19.5	16PR	Premium D03	16.0	7.5	2500/2360	140/138	L	775
265/70R19.5	18PR	Premium D03	16.0	7.5	2725/2575	143/141	J	850
265/70R19.5	16PR	Premium A03	14.0	7.50	2500/2360	140/138	L	775
265/70R19.5	18PR	Premium A03	14.0	7.50	2725/2575	143/141	J	850
275/70R22.5	18PR	Premium A03	15.0	8.25	3000/2725	146/143	L	900
275/80R22.5	18PR	Premium A03	15.0	8.25	3250/3000	149/146	L	900
285/75R24.5	16PR	Premium A08	14.5	8.25	3075/2800	147/144	L	830
285/75R24.5	16PR	Premium D21	19.5	8.25	3075/2800	147/144	L	830
295/60R22.5	18PR	Premium A03	16.0	9.00	3350/3075	150/147	L	900
295/75R22.5	16PR	Premium D02	23.0	9.00	3000/2725	146/143	K	830
295/75R22.5	16PR	Premium D19	20.0	9.00	3000/2725	146/143	L	830
295/75R22.5	16PR	Premium A02	15.0	9.00	3000/2725	146/143	L	830
295/75R22.5	16PR	Premium A03	15.0	9.00	3000/2725	146/143	M	830
295/75R22.5	16PR	Premium D21	19.5	9.00	3000/2725	146/143	L	830
295/75R22.5	16PR	Premium W01	23.0	9.00	3000/2725	146/143	K	830
295/75R22.5	16PR	Premium W02	23.0	9.00	3000/2725	146/143	K	830
295/80R22.5	18PR	Premium A01	16.0	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium D26	18.5	9.00	3550/3250	152/149	K	900
295/80R22.5	18PR	Premium D28	19.5	9.00	3550/3250	152/149	M	900
295/80R22.5	18PR	Premium D01	18.5	9.00	3550/3250	152/149	K	900
295/80R22.5	18PR	Premium A08	15.5	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium A03	15.5	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium A10	14.5	9.00	3550/3250	152/149	M	900
295/80R22.5	18PR	Premium A20	16.0	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium A09	16.5	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium D29	18.0	9.00	3550/3250	152/149	L	900
295/80R22.5	18PR	Premium D36	21.0	9.00	3550/3250	152/149	K	900
295/80R22.5	20PR	Premium D36	21.0	9.00	3750/3450	154/151	G	930
295/80R22.5	18PR	Premium M01	22.0	9.00	3550/3250	152/149	J	900
295/80R22.5	20PR	Premium M01	22.0	9.00	3750/3450	154/151	G	930
295/80R22.5	18PR	Premium M09	24.0	9.00	3550/3250	152/149	K	900
315/80R22.5	20PR	Premium A01	16.0	9.00	4125/3750	157/154	L	900
315/80R22.5	20PR	Premium D26	20.5	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium D01	20.0	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium D03	20.0	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium A08	14.5	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium A03	15.0	9.00	4125/3750	157/154	L	900
315/80R22.5	20PR	Premium A10	14.0	9.00	4125/3750	157/154	L	900
315/80R22.5	20PR	Premium A26	15.0	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium A20	16.0	9.00	4125/3750	157/154	L	900
315/80R22.5	20PR	Premium D30	20.5	9.00	4125/3750	157/154	K	900
315/80R22.5	20PR	Premium D36	22.0	9.00	4125/3750	157/151	K	900
315/80R22.5	22PR	Premium D36	22.0	9.00	4500/4125	160/157	K	930
315/80R22.5	20PR	Premium M01	22.0	9.00	4125/3750	157/151	K	900
315/80R22.5	22PR	Premium M01	22.0	9.00	4500/4125	160/157	G	930
325/95R24	20PR	Premium A20	17.5	9.00	5000/4750	164/162	K	900
385/65R22.5	20PR	Premium A01	16.5	11.75	4500	160	K	900
385/65R22.5	20PR	Premium A12	15.5	11.75	4500	160	K	900
385/65R22.5	24PR	Premium A12	15.5	11.75	5000	164	K	900
385/65R22.5	20PR	Premium A11	16.7	11.75	4500	160	K	900
385/65R22.5	24PR	Premium A11	16.7	11.75	5000	164	K	900
385/55R22.5	20PR	Premium A11	16.5	12.25	4500	160	K	900
425/65R22.5	22PR	Premium D31	18.0	12.25	5300	166	K	900